

140 N-LINE FASCIA PANEL

*"Endurance, Euro & Copper Range" may come without swaging.

140 N-Line Fascia will provide a superb, low maintenance finish, with crisp, clean lines to complement your new Kiwi home, perfectly.

Features

Overview

- ✓ Easy Maintenance
- ✓ Hidden, fast clip system
- ✓ Designed for new construction
- ✓ Flat panel options
- ✓ Up to 20 year material warranty
- √ 15 Standard Colours & more!





| Finish Range | Fascia Material | Colour Choice | Bracket Material | Corner styling | Spouting Options |
|------------------|--------------------|---------------------|------------------|----------------|--------------------------|
| CG Range | MagnaFlow™ | Top 15 Colours | Galvanised steel | Soaker | Chief |
| Designer Range | MagnaFlow™ | 34 Designer Colours | Galvanised steel | Hand cut mitre | Big Chief |
| Endurance Range* | Alumi Gard™ | Top 4 Colours | Galvanised steel | Hand cut mitre | Quartz |
| Euro Range* | EuraMax | 4 Premium Colours | Galvanised steel | Hand cut mitre | Cube 125 Halo 125/150 |
| Copper* | Pure Copper | Natural | Brass | Hand cut mitre | Halu 123/130 |

Available from these Continuous Group Locations:

AUCKLAND | TARANAKI | WHANGANUI/MANAWATU



Continuous Group_®

Spouting Fascia Downpipes



140 N-LINE FASCIA PANEL

| PRODUCT SPECIFICATIONS | | | |
|----------------------------------|--|--|--|
| MagnaFlow* Pre-painted Steel | 0.55mm G300 with a minimum of 200gsm alloy/zinc coating. | | |
| AlumiGard* Pre-painted Aluminium | 0.70mm Grade 5005 H34 | | |
| EuraMax Pre-painted Aluminium | 0.80mm Grade 5754 H42 | | |
| Pure Copper Copper 3/4 Hard | 0.55mm Grade C12200 | | |
| Bracket | 0.95mm G250 Steel-Galv Z275 0.95mm Brass—hard | | |
| Maximum bracket spacing | 900mm (Refer to set out requirements below) | | |
| Recommended Fixings | Minimum Class 4 screw &/or rivet fasteners compatible with substrate and bracket material. | | |

IMPORTANT SET OUT REQUIREMENTS

Gable ends may require packing under rafter.

Soffit bearer fixed to R/H side, looking at the building.


Install the bottom purlin after fascia installation.

Soffit grove allows a sloping soffit up to 30 degrees.

Soffit bearers are required on all hip corners.

Metal fascia's are a specialised system that require specialised installers

We do not recommend, support or approve DIY installations. Continuous Group offer an installation service throughout New Zealand. Refer to our website for contact and location details. www.continuous.co.nz/contact

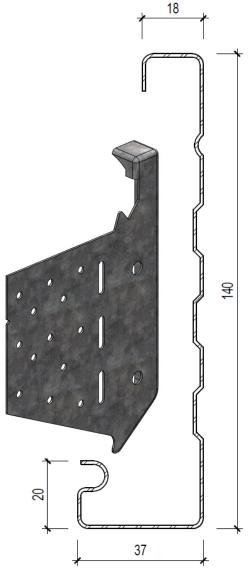

| Scope of use | Continuous Group Truss Series fascia systems are intended for use as fascia and barge boards to support spouting systems, covering roof truss ends and gable ends around the roof perimeter on timber trussed residential buildings. |
|-----------------|---|
| NZBC Compliance | Test information available from Pacific Coilcoaters, New Zealand Steel and Ambro Metals, combined with past history of fascia systems, indicate, that provided the product use and maintenance is in line with the guidelines contained in the current literature,. Continuous Group truss series fascia systems can be expected to meet the performance criteria in clause E2 of the New Zealand building code. |
| Durability | All copper, brass and aluminium products listed above are fit for purpose in environment zone B, C, D and E* Pre-painted steel products are fit for purpose in environment Zone B and C* They may be used in environment zone D subject to a pre-approval warranty application based on site address* *In all cases, areas with high wind &/or salt &/or thermal/industrial atmospheric conditions may require specific engineering design (S.E.D) Reference: Section 4, "Durability" from NZS3604:2011. |
| Maintenance | Continuous Group Truss Series Fascia systems require regular maintenance to ensure the useful life of the products. Minimum maintenance interval of every 6 months <u>or</u> as often as needed to avoid build up of contaminants (dirt, salt, pollen etc.) on the fascia surface. Simply spray and rinse with water and/or if necessary scrub with a soft nylon brush. More information and specific maintenance products are available on our website <u>www.continuous.co.nz/care-and-maintenance</u> |
| Warranty | Magna Flow*: Environment zone B, C & D—10 year paint warranty; 15 year perforation warranty. Alumi Gard*: 10 year paint warranty; 15 year perforation warranty. Pure Copper & EuraMax: 20 year material and perforation warranty. Full details and conditions of our comprehensive warranty can be found at www.continuous.co.nz/warranties |