135MM · QUARTER ROUND

QUARTZ



It doesn't just manage the rain; it completes the architecture. There is a reason The Quartz is our most sought-after profile, designed with minimalist principles in mind. The Quartz offers crisp, clean lines that define the roofline without distracting from the overall design.

Ideally suited for modern new builds and renovations wanting a contemporary clean look. Our most popular residential profile.

- Generous 135mm quarter-round mouth
- Continuous — no straight-line joins
- Tough marine-grade materials
- Internal & external bracket options
- Up to 20 year material warranty
- Matching downpipes & snow protection

SPECIFY YOUR QUARTZ PROFILE

FINISH RANGE	SPOUTING MATERIAL	COLOUR CHOICE	BRACKET MATERIAL	BRACKET OPTIONS
CG Range	ColorCote MagnaFlow pre-painted G300 steel, min 200gsm	17 CG Colours	Aluminium	Internal · External
Designer Range	ColorCote MagnaFlow pre-painted G300 steel, min 200gsm or ColorSteel Maxam, min 150gsm	25 Designer Colours	Aluminium	Internal · External
Specialty Range	ColorCote MagnaFlow pre-painted G300 steel, min 200gsm, MagnaFlow Plus pre-painted G300 steel, min 200gsm* or ColorSteel Maxam, min 150gsm	20 Specialty Colours	Aluminium	Internal · External
Copper	Pure copper, ¾ hard, grade C12200	Natural Copper	Copper	Internal · External

* Limited colours available

DOWNPIPE OPTIONS

65mm & 80mm round · 75×55 & 100×55 rectangle

SNOW PROTECTION

Snow hooks or snow straps



Quartz Profile



Quartz Profile with Internal Bracket



Quartz Profile with External Bracket

AVAILABLE FROM THESE CONTINUOUS GROUP LOCATIONS


Northland	Auckland	Waikato	Bay of Plenty	Taranaki
Gisborne	Hawke's Bay	Manawatū	Kapiti Coast	Wairarapa
Wellington	Nelson	Marlborough	Buller	West Coast
Canterbury	Otago	Southland		

0800 50 1993
www.continuous.co.nz
cg@continuous.co.nz

All information, images and drawings are correct at time of publication August 2026

TECHNICAL SPECIFICATION

QUARTZ 135mm Quarter Round

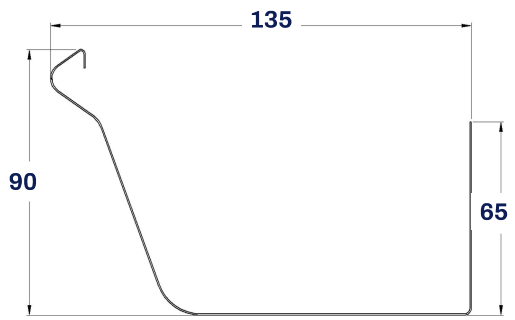

CAPACITY & INSTALLATION

Maximum cross-sectional area	**7,378 mm²**
Flow capacity	**108.7 L/min**
Recommended fall	**1:1000 — 1mm per metre**
Maximum bracket spacing	**750mm** **600mm in snow zones**
Snow protection	**Snow hooks or snow straps**
Minimum overflow gap	**3.00mm continuous overflow emergency gap**
Minimum downpipe cross-section	**3,550 mm²**
Round downpipe cross-sections	**65mm ø = 3,550 mm²** **80mm ø = 5,020 mm²**
Rectangular downpipe cross-sections	**75×55 = 4,125 mm²** **100×55 = 5,500 mm²**

PRODUCT SPECIFICATIONS

Pre-painted steel	0.55mm G300 — ColorCote MagnaFlow with min 200gsm alloy/zinc/magnesium coating, Colorcote MagnaFlow Plus with min 200gsm alloy/zinc/magnesium with PVDF coating or ColorSteel Maxam with min 150gsm alloy/zinc/magnesium coating
Pure copper	0.50mm copper, ¾ hard, grade C12200
Internal bracket	2.00mm aluminium 5052-H32, or 2.00mm copper (hard) C12200
External bracket	3.00mm aluminium 5052-H32, or 2.50mm copper (hard) C12200
Recommended fixings	Minimum Class 4 screw and/or rivet fasteners, compatible with substrate and bracket material

SCOPE OF USE

Continuous Group rainwater systems are intended to collect and channel water that runs off a roof. The metal spouting is intended to be placed at the perimeter of the building, positioned outside the building envelope.

NZBC COMPLIANCE

Test information available from Pacific Coilcoaters, New Zealand Steel and Ambro Metals, combined with the past history of rainwater products, indicates that provided product use and maintenance is in line with the guidelines in current literature, Continuous Group rainwater systems can be expected to meet the performance criteria in clause E2 of the New Zealand Building Code.

DURABILITY

Pure copper products are fit for purpose in environment zones B, C, D and E.* Pre-painted steel products are fit for purpose in environment zones B and C;* zone D may require a pre-approval warranty application based on the site address.*

*In all cases, areas with high wind and/or salt and/or thermal or industrial atmospheric conditions may require specific engineering design (SED). Reference: Section 4, "Durability", NZS 3604:2011.

MAINTENANCE

Continuous Group rainwater systems require regular maintenance to ensure the useful life of the products. Minimum maintenance interval of every 6 months, or as often as needed to avoid build-up of contaminants such as dirt, salt and pollen on the spouting surface. Simply spray and rinse with water and, if necessary, scrub with a soft nylon brush. Specific maintenance products are listed in our Care & Maintenance document.

WARRANTY

MagnaFlow & Maxam pre-painted steel*

15 year Perforation warranty — exposure zones B, C and D.

10 year Paint warranty — exposure zones B, C and D.

Pure copper

20 year Material and perforation warranty — exposure zones B, C, D and E.

*Subject to manual washing. Full details and conditions of our comprehensive Warranty are on our website.

0800 50 1993 · www.continuous.co.nz · cg@continuous.co.nz

All information, images and drawings are correct at time of publication August 2026