MULTI FIT · FASCIA COVER SYSTEM

COVER U

Another innovative product from the Continuous Group team. Cover U wraps tired timber fascia and barge boards in pre-painted steel or copper — no sanding, no repairing, no painting — and takes new continuous spouting straight off the back of it.

Ideally suited for existing homes. Fitted straight over the top of the existing fascia.



Cover U installed, before new continuous spouting & downpipes

- Fits over existing tired fascia
- No sanding, repairing or painting
- Multi-fit — suits multiple board sizes
- Concealed high-impact DPC flashing
- 10 year paint guarantee
- Up to 20 year substrate guarantee

SPECIFY YOUR COVER U

FINISH RANGE	COVER U MATERIAL	COLOUR CHOICE	FLASHING MATERIAL	COMPATIBLE WITH
CG Range	ColorCote MagnaFlow (min 200gsm) or ColorSteel Maxam (min 150gsm) pre-painted G300 steel	17 CG Colours	Synthetic DPC	All CG spouting profiles
Designer Range	ColorCote MagnaFlow, min 200gsm, or ColorSteel Maxam, min 150gsm pre-painted G300 steel	25 Designer Colours	Synthetic DPC	All CG spouting profiles
Specialty Range	ColorCote MagnaFlow pre-painted G300 steel, min 200gsm, MagnaFlow Plus pre-painted G300 steel, min 200gsm* or ColorSteel Maxam, min 150gsm	20 Specialty Colours	Synthetic DPC	All CG spouting profiles
Endurance Range	ColorCote AlumiGard or ColorSteel Altimate pre-painted aluminium	6 Endurance Colours	Synthetic DPC	All CG spouting profiles
Copper	Pure copper, ¾ hard, grade C12200	Natural Copper	Bitumen DPC	All CG spouting profiles

* Limited colours available

SIZING

Customised to suit the existing board · hand-cut mitre corners

FIXING SPACING

1200mm maximum · no brackets required

Cover U is designed to cover timber-based materials and needs an existing fascia free from excessive rot.

FITS OVER WHAT IS ALREADY THERE

The multi-fit system suits a range of fascia and barge board sizes, and a concealed high-impact flashing sits behind it as a moisture barrier. On a fascia with minor variations Cover U will help straighten the line — it is not intended to correct excessive truss movement.

10 year
PAINT GUARANTEE

20 year
SUBSTRATE GUARANTEE, UP TO

AVAILABLE FROM THESE CONTINUOUS GROUP LOCATIONS


Northland, Auckland, Waikato, Bay of Plenty, Taranaki
Gisborne, Hawke's Bay, Manawatū, Kapiti Coast, Wairarapa
Wellington, Nelson, Marlborough, Buller, West Coast
Canterbury, Otago, Southland

0800 50 1993
www.continuous.co.nz
cg@continuous.co.nz

All information, images and drawings are correct at time of publication August 2026

TECHNICAL SPECIFICATION

COVER U Fascia Cover System

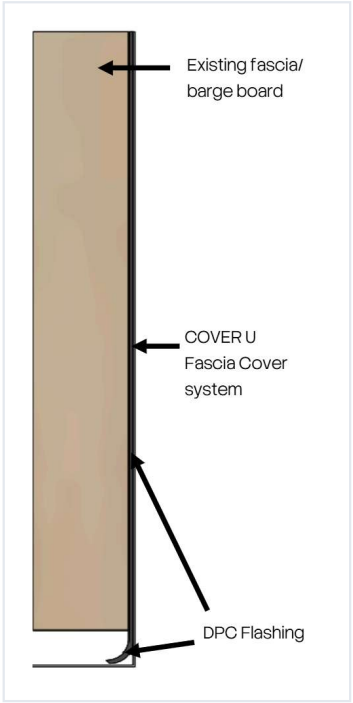

PRODUCT SPECIFICATIONS

Pre-painted steel	0.55mm G300 — ColorCote MagnaFlow with min 200gsm alloy/zinc/magnesium coating, Colorcote MagnaFlow Plus with min 200gsm alloy/zinc/magnesium with PVDF coating or ColorSteel Maxam with min 150gsm alloy/zinc/magnesium coating
Pre-painted aluminium	0.90mm — Colorcote AlumiGard or Colorsteel Altimate, substrate aluminium Grade 5005 H34
Pure copper	0.55mm copper, ¾ hard, grade C12200
Flashing	Synthetic DPC, or bitumen DPC
Maximum fixing spacing	1200mm
Corner styling	Hand-cut mitre. Height customised to suit the existing board
Recommended fixings	Minimum Class 4 screw and/or rivet fasteners, compatible with substrate and bracket material

IMPORTANT INSTALLATION INFORMATION

- Cover U is designed to cover timber-based materials, and fastens to an existing fascia system — the timber must be free from excessive rot.
- Gable ends will require refixing of barge flashings.
- An asbestos test may be required before or during installation. This is at the customer's cost.
- Depending on the condition and straightness of the timber fascia, Cover U will assist in straightening minor variations. It is not intended to straighten areas where excessive truss movement has occurred over time.

> **Metal fascias are a specialised system that require specialised installers.** We do not recommend, support or approve DIY installations. Continuous Group offer an installation service throughout New Zealand — see www.continuous.co.nz/contact.

SCOPE OF USE

Continuous Group fascia cover systems are intended for use as fascia and barge boards to support spouting systems, covering existing timber fascias around the roof perimeter on timber-trussed residential buildings.

NZBC COMPLIANCE

Test information available from Pacific Coilcoaters, New Zealand Steel and Ambro Metals, combined with the past history of fascia systems, indicates that provided product use and maintenance is in line with the guidelines in current literature, Continuous Group fascia cover systems can be expected to meet the performance criteria in clause E2 of the New Zealand Building Code.

DURABILITY

Pure copper and pre-painted aluminium products are fit for purpose in environment zones B, C, D and E.* Pre-painted steel products are fit for purpose in environment zones B and C;* zone D may require a pre-approval warranty application based on the site address.*

*In all cases, areas with high wind and/or salt and/or thermal or industrial atmospheric conditions may require specific engineering design (SED). Reference: Section 4, "Durability", NZS 3604:2011.

MAINTENANCE

Continuous Group fascia cover systems require regular maintenance to ensure the useful life of the products. Minimum maintenance interval of every 6 months, or as often as needed to avoid build-up of contaminants such as dirt, salt and pollen on the fascia surface. Simply spray and rinse with water and, if necessary, scrub with a soft nylon brush. Specific maintenance products are listed in our Care & Maintenance document.

WARRANTY

MagnaFlow & Maxam pre-painted steel*

15 year Perforation warranty — exposure zones B, C and D.
10 year Paint warranty — exposure zones B, C and D.

AlumiGard & Altimate pre-painted aluminium*

15 year Perforation warranty — exposure zones B, C and D.
10 year Paint warranty — exposure zones B, C, D and E.

Pure copper
20 year material and perforation warranty — exposure zones B, C, D and E.

*Subject to manual washing depending on exposure zone. Full details and conditions of our comprehensive Warranty are on our website.

0800 50 1993 · www.continuous.co.nz · cg@continuous.co.nz

All information, images and drawings are correct at time of publication August 2026