
GUTTER REINFORCEMENT

SNOW STRAPS

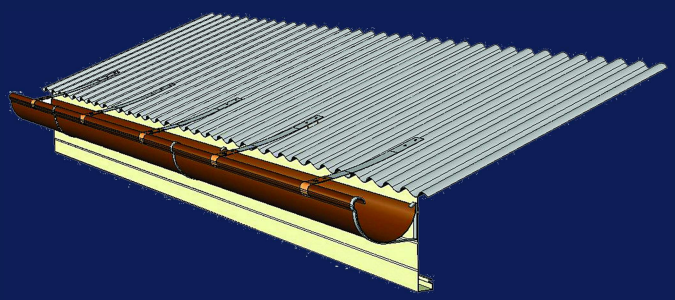

Snow straps give your rainwater system extra strength — double-riveted into the spouting bead between the brackets and fixed back to the roof, holding the gutter up under snow load.

Ideally suited for snow zones and high wind zones — new builds or retro-fitted to existing spouting. Compatible with every Continuous Group spouting profile.

- Double rivets into the spouting bead for additional shear loading
- Designed & manufactured in New Zealand
- Colours to match and blend with your roof*
- Additional support for high wind zones
- Can be retro-fitted

SPECIFY YOUR SNOW STRAPS

FINISH RANGE	BASE MATERIAL	COLOUR CHOICE	TIP MATERIAL	SNOW LOADING
CG Range	ColorCote MagnaFlow 200gsm	17 CG Colours	MagnaFlow 200gsm	Up to 2.0 kPa**
Designer Range	ColorCote MagnaFlow 200gsm	25 Designer Colours	MagnaFlow 200gsm	Up to 2.0 kPa**
Copper*	Pure Copper or MagnaFlow 200gsm	Natural Copper	Natural Copper	Up to 2.0 kPa**


COMPATIBLE SPOUTING

All Continuous Group spouting profiles

MAXIMUM SPACING

Installed at 400mm centres, between spouting brackets

*Not all roof colours can be matched. For textured metal roof tiles, snow straps come in a flat finish only. **For snow loading zones and altitudes, refer to NZS 3604 Section 15.

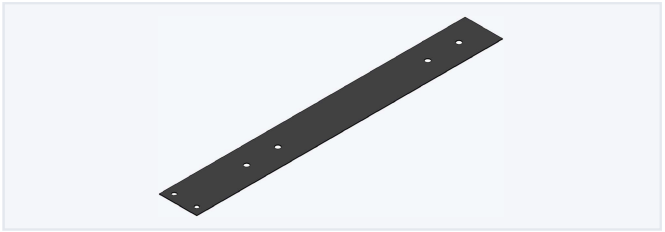

Snow strap



Double-riveted into the spouting bead

AVAILABLE FROM THESE CONTINUOUS GROUP LOCATIONS

Northland, Auckland, Waikato, Bay of Plenty, Taranaki
Gisborne, Hawke's Bay, Manawatū, Kapiti Coast, Wairarapa
Wellington, Nelson, Marlborough, Buller, West Coast
Canterbury, Otago, Southland

0800 50 1993
www.continuous.co.nz
cg@continuous.co.nz

All information, images and drawings are correct at time of publication August 2026

TECHNICAL SPECIFICATION

SNOW STRAPS Gutter reinforcement

CONTINUOUS GROUP Made first. Made to last.



PRODUCT SPECIFICATIONS

Pre-painted steel	0.55mm G300 with a minimum 200gsm alloy/zinc coating
Pure copper	0.50mm copper, ¾ hard, grade C12200
Tip material	MagnaFlow 200gsm, or 0.50mm copper grade C12200 when attaching to copper spouting
Recommended maximum spacing	Installed at 400mm centres, centred between spouting brackets
Recommended fixings	Minimum Class 4 screw fasteners, compatible with substrate and bracket material
Snow loading	Up to 2.0 kPa — refer to the zone table below

SNOW LOADING ZONES

ZONE	REGION	MAX ALTITUDE @ 2.0 KPA
Zone 1	Gisborne / south of Taupō / south of New Plymouth	**850 m**
Zone 2	Buller & Westland	**850 m**
Zone 3	Nelson / Marlborough	**850 m**
Zone 4	Canterbury / Central Otago / Otago, north of Waitati	**350 m**
Zone 5	Southland / Otago, south of Waitati	**400 m**

New Zealand is divided in NZS 3604 into six zones where the maximum snow load is 2 kPa. Any area above the specific altitude for its zone requires specific design.

SCOPE OF USE

Continuous Group snow solutions are intended to provide additional fixings to assist gutters from collapse in light to medium snow falls. Rare snow falls or “marine” snow falls may exceed the maximum 2 kPa limit detailed in NZS 3604 and may require specific design.

NZBC COMPLIANCE

Projections such as gutters, flashings and chimneys need additional fixings and detailing to resist loads from sliding snow. Continuous Group snow straps are solely an additional fixing as described in MRM COP section 3.8.

DURABILITY

Pure copper products are fit for purpose in environment zones B, C, D and E.* Pre-painted steel products are fit for purpose in environment zones B and C;* zone D may require a pre-approval warranty application based on the site address.*

*In all cases, areas with high wind and/or salt and/or thermal or industrial atmospheric conditions may require specific engineering design (SED). Reference: Section 4, “Durability”, NZS 3604:2011.

MAINTENANCE

Continuous Group snow solutions require regular maintenance to ensure the useful life of the products. Minimum maintenance interval of every 6 months, or as often as needed to avoid build-up of contaminants such as dirt, salt and pollen on the product surface. Simply spray and rinse with water and, if necessary, scrub with a soft nylon brush. Specific maintenance products are listed in our Care & Maintenance document.

WARRANTY

MagnaFlow pre-painted steel*

15 year Perforation warranty — exposure zones B, C and D.

10 year Paint warranty — exposure zones B, C and D.

Pure copper

20 year material and perforation warranty.

*Subject to manual washing depending on exposure zone. Full details and conditions of our comprehensive Warranty are on our website.

All information, images and drawings are correct at time of publication August 2026