150MM · HALF ROUND

HALO 150

This profile will bring an outstanding finish that quietly but firmly demonstrates attention to detail on any Kiwi home. The Halo 150 half-round spouting profile is consistently selected for premium residential builds by architects and specifiers, as its European lineage provides stunning aesthetics in conjunction with excellent performance.

Ideally suited for premium residential builds and architect-specified homes. The go-to half-round for high-end new builds.



- True 150mm half-round designer profile
- Four external bracket styles
- Continuous runs — availability varies by region
- Up to 20 year material warranty
- Pre-painted steel, pre-painted aluminium or copper
- Matching downpipes & snow protection

SPECIFY YOUR HALO PROFILE

FINISH RANGE	SPOUTING MATERIAL	COLOUR CHOICE	BRACKET MATERIAL	BRACKET OPTIONS
CG Range	ColorCote MagnaFlow pre-painted G300 steel, min 200gsm	17 CG Colours	Aluminium	Buz-150
Designer Range	ColorCote MagnaFlow pre-painted G300 steel, min 200gsm or ColorSteel Maxam, min 150gsm	25 Designer Colours	Aluminium	Buz-150 Short Rev Long Rev
Specialty Range	ColorCote MagnaFlow pre-painted G300 steel, min 200gsm, MagnaFlow Plus pre-painted G300 steel, min 200gsm* or ColorSteel Maxam, min 150gsm	20 Specialty Colours	Aluminium	Buz-150 Short Rev Long Rev
Endurance Range	Pre-painted aluminium, 0.90mm — Colorcote AlumiGard or Colorsteel Altimate, substrate aluminium Grade 5005 H34	6 Endurance Colours	Aluminium	Buz-150 Short Rev Long Rev
Copper	Pure copper, ¾ hard, grade C12200	Natural Copper	Copper or Brass	Preston Ornate

* Limited colours available

DOWNPIPE OPTIONS

65mm, 80mm & 100mm round · 75×55 & 100×55 rectangle

SNOW PROTECTION

Snow straps

Halo 150 may be supplied in lengths with straight-line joins (not run continuous) depending on region. Please discuss with our local team.



Halo Profile




Halo Buz-150 External Bracket



Halo Long Rev External Bracket



Halo Short Rev External Bracket



Halo Preston Ornate External Bracket

AVAILABLE FROM THESE CONTINUOUS GROUP LOCATIONS


Northland	Auckland	Waikato	Bay of Plenty	Taranaki
Gisborne	Hawke's Bay	Manawatū	Kapiti Coast	Wairarapa
Wellington	Nelson	Marlborough	Buller	West Coast
Canterbury	Otago	Southland		

0800 50 1993
www.continuous.co.nz
cg@continuous.co.nz

All information, images and drawings are correct at time of publication August 2026

TECHNICAL SPECIFICATION

HALO 150 150mm Half Round

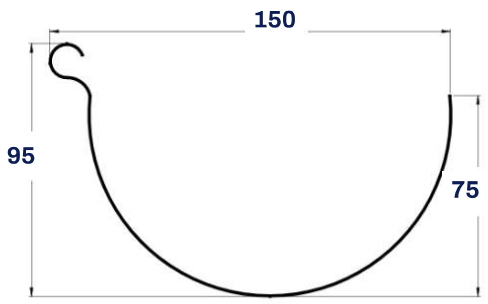

CAPACITY & INSTALLATION

Maximum cross-sectional area	**7,460 mm²**
Flow capacity	**110.2 L/min**
Recommended fall	**1:1000 — 1mm per metre**
Maximum bracket spacing	**750mm** **600mm in snow zones**
Snow protection	**Snow straps**
Minimum overflow gap	**3.00mm continuous overflow** **emergency gap**
Minimum downpipe cross-section	**3,550 mm²**
Round downpipe cross-sections	**65mm ø = 3,550 mm²** **80mm ø = 5,020 mm²** **100mm ø = 7,690 mm²**
Rectangular downpipe cross-sections	**75×55 = 4,125 mm²** **100×55 = 5,500 mm²**

PRODUCT SPECIFICATIONS

Pre-painted steel	0.55mm G300 — ColorCote MagnaFlow with min 200gsm alloy/zinc/magnesium coating, Colorcote MagnaFlow Plus with min 200gsm alloy/zinc/magnesium with PVDF coating or ColorSteel Maxam with min 150gsm alloy/zinc/magnesium coating	
Pre-painted aluminium	0.90mm — Colorcote AlumiGard or Colorsteel Altimate, substrate aluminium Grade 5005 H34	
Pure copper	0.50–0.60mm copper, ¾ hard, grade C12200	
External brackets	**Buz-150**	4.00mm aluminium 5052-H32
	Short Rev & Long Rev	4.00mm extruded aluminium
	Preston Ornate	2.50mm brass or copper (hard)
Recommended fixings	Minimum Class 4 screw and/or rivet fasteners, compatible with substrate and bracket material	

SCOPE OF USE

Continuous Group rainwater systems are intended to collect and channel water that runs off a roof. The metal spouting is intended to be placed at the perimeter of the building, positioned outside the building envelope.

NZBC COMPLIANCE

Test information available from Pacific Coilcoaters, New Zealand Steel and Ambro Metals, combined with the past history of rainwater products, indicates that provided product use and maintenance is in line with the guidelines in current literature, Continuous Group rainwater systems can be expected to meet the performance criteria in clause E2 of the New Zealand Building Code.

DURABILITY

Pure copper and pre-painted aluminium products are fit for purpose in environment zones B, C, D and E.* Pre-painted steel products are fit for purpose in environment zones B and C;* zone D may require a pre-approval warranty application based on the site address.*

*In all cases, areas with high wind and/or salt and/or thermal or industrial atmospheric conditions may require specific engineering design (SED). Reference: Section 4, "Durability", NZS 3604:2011.

MAINTENANCE

Continuous Group rainwater systems require regular maintenance to ensure the useful life of the products. Minimum maintenance interval of every 6 months, or as often as needed to avoid build-up of contaminants such as dirt, salt and pollen on the spouting surface. Simply spray and rinse with water and, if necessary, scrub with a soft nylon brush. Specific maintenance products are listed in our Care & Maintenance document.

WARRANTY

MagnaFlow & Maxam pre-painted steel*

15 year Perforation warranty — exposure zones B, C and D.

10 year Paint warranty — exposure zones B, C and D.

Pure copper

20 year Material and perforation warranty — exposure zones B, C, D and E.

AlumiGard & Altimate pre-painted aluminium

15 year Perforation warranty — exposure zones B, C, D and E.

10 year Paint warranty — exposure zones B, C, D and E.

*Subject to manual washing depending on exposure zone. Full details and conditions of our comprehensive Warranty are on our website.

0800 50 1993 · www.continuous.co.nz · cg@continuous.co.nz

All information, images and drawings are correct at time of publication August 2026