185MM · QUARTER ROUND

QUARTZ PLUS



Sometimes the roof asks for more than the standard. Quartz Plus keeps the same crisp quarter-round line as The Quartz — just scaled up. 52% more capacity, so perfect for large roof areas without moving to a commercial-looking profile.

Ideally suited for large roof areas or high-rainfall environments wanting the Quartz look with more capacity. Modern new builds.

- Large 185mm quarter-round mouth
- 52% more capacity than Quartz
- Tough marine-grade materials
- Internal & external bracket options
- 15 year material warranty
- Matching downpipes & snow straps

SPECIFY YOUR QUARTZ PLUS

FINISH RANGE	SPOUTING MATERIAL	COLOUR CHOICE	BRACKET MATERIAL	BRACKET OPTIONS
CG Range	ColorCote MagnaFlow pre-painted G300 steel, min 200gsm	17 CG Colours	Aluminium	Internal · External
Designer Range	ColorCote MagnaFlow pre-painted G300 steel, min 200gsm or ColorSteel Maxam, min 150gsm	25 Designer Colours	Aluminium	Internal · External
Specialty Range	ColorCote MagnaFlow pre-painted G300 steel, min 200gsm, MagnaFlow Plus pre-painted G300 steel, min 200gsm* or ColorSteel Maxam, min 150gsm	20 Specialty Colours	Aluminium	Internal · External

* Limited colours available

DOWNPIPE OPTIONS

65mm, 80mm & 100mm round · 75×55 & 100×55 rectangle

SNOW PROTECTION

Snow straps

Quartz Plus is supplied in lengths with straight-line joins — it is not a continuous-run profile.



Quartz Plus Profile



Quartz Plus Profile with Internal Bracket



Quartz Plus Profile with External Bracket

AVAILABLE FROM THESE CONTINUOUS GROUP LOCATIONS


Northland, Auckland, Waikato, Bay of Plenty, Taranaki
Gisborne, Hawke's Bay, Manawatū, Kapiti Coast, Wairarapa
Wellington, Nelson, Marlborough, Buller, West Coast
Canterbury, Otago, Southland

0800 50 1993
www.continuous.co.nz
cg@continuous.co.nz

All information, images and drawings are correct at time of publication August 2026

TECHNICAL SPECIFICATION

QUARTZ PLUS 185mm Quarter Round

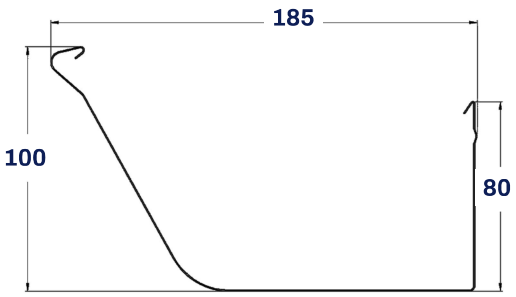

CAPACITY & INSTALLATION

Maximum cross-sectional area	**11,215 mm²**
Flow capacity	**183 L/min**
Recommended fall	**1:1000 — 1mm per metre**
Maximum bracket spacing	**600mm**
Snow protection	**Snow straps**
Minimum overflow gap	**3.00mm continuous overflow emergency gap**
Minimum downpipe cross-section	**3,550 mm²**
Round downpipe cross-sections	**65mm ø = 3,550 mm²** **80mm ø = 5,020 mm²** **100mm ø = 7,690 mm²**
Rectangular downpipe cross-sections	**75×55 = 4,125 mm²** **100×55 = 5,500 mm²**

PRODUCT SPECIFICATIONS

Pre-painted steel	0.55mm G300 — ColorCote MagnaFlow with min 200gsm alloy/zinc/magnesium coating, Colorcote MagnaFlow Plus with min 200gsm alloy/zinc/magnesium with PVDF coating or ColorSteel Maxam with min 150gsm alloy/zinc/magnesium coating
Internal bracket	2.50mm aluminium 5052-H32
External bracket	4.00mm aluminium 5052-H33
Recommended fixings	Minimum Class 4 screw and/or rivet fasteners, compatible with substrate and bracket material

SCOPE OF USE

Continuous Group rainwater systems are intended to collect and channel water that runs off a roof. The metal spouting is intended to be placed at the perimeter of the building, positioned outside the building envelope.

NZBC COMPLIANCE

Test information available from Pacific Coilcoaters and New Zealand Steel, combined with the past history of rainwater products, indicates that provided product use and maintenance is in line with the guidelines in current literature, Continuous Group rainwater systems can be expected to meet the performance criteria in clause E2 of the New Zealand Building Code.

DURABILITY

Pre-painted steel products are fit for purpose in environment zones B and C;* zone D may require a pre-approval warranty application based on the site address.*

*In all cases, areas with high wind and/or salt and/or thermal or industrial atmospheric conditions may require specific engineering design (SED). Reference: Section 4, "Durability", NZS 3604:2011.

MAINTENANCE

Continuous Group rainwater systems require regular maintenance to ensure the useful life of the products. Minimum maintenance interval of every 6 months, or as often as needed to avoid build-up of contaminants such as dirt, salt and pollen on the spouting surface. Simply spray and rinse with water and, if necessary, scrub with a soft nylon brush. Specific maintenance products are listed in our Care & Maintenance document.

WARRANTY

MagnaFlow & Maxam pre-painted steel*

15 year Perforation warranty — exposure zones B, C and D.

10 year Paint warranty — exposure zones B, C and D.

*Subject to manual washing. Full details and conditions of our comprehensive Warranty are on our website.

0800 50 1993 · www.continuous.co.nz · cg@continuous.co.nz

All information, images and drawings are correct at time of publication August 2026