



180 S-LINE FASCIA PANEL


PRODUCT SPECIFICATIONS

MagnaFlow™ Pre-painted Steel	0.55mm G300 with a minimum of 200gsm alloy/zinc coating.
AlumiGard™ Pre-painted Aluminium	0.70mm Grade 5005 H34
EuraMax Pre-painted Aluminium	0.80mm Grade 5754 H42
Pure Copper Copper 3/4 Hard	0.55mm Grade C12200
Bracket	1.15mm G250 Steel-Galv Z275 0.95mm Brass, copper or stainless—hard
Maximum bracket spacing	900mm (Refer to set out requirements below)
Recommended Fixings	Minimum Class 4 screw &/or rivet fasteners compatible with substrate and bracket material.

IMPORTANT SET OUT REQUIREMENTS

- Gable ends may require packing under rafter .
- Soffit bearer can be fixed after fascia installation. (Consult with local branch)
- Bottom purlin to be installed plum to rafter end to reduce cavity gap.
- Soffit groove allows a sloping soffit up to 28 degrees.
- Soffit bearers are required on all hip corners .

Metal fascia's are a specialised system that require specialised installers.
 We do not recommend, support or approve DIY installations.
 Continuous Group offer an installation service throughout New Zealand. Refer to our website for contact and location details.
www.continuous.co.nz/contact

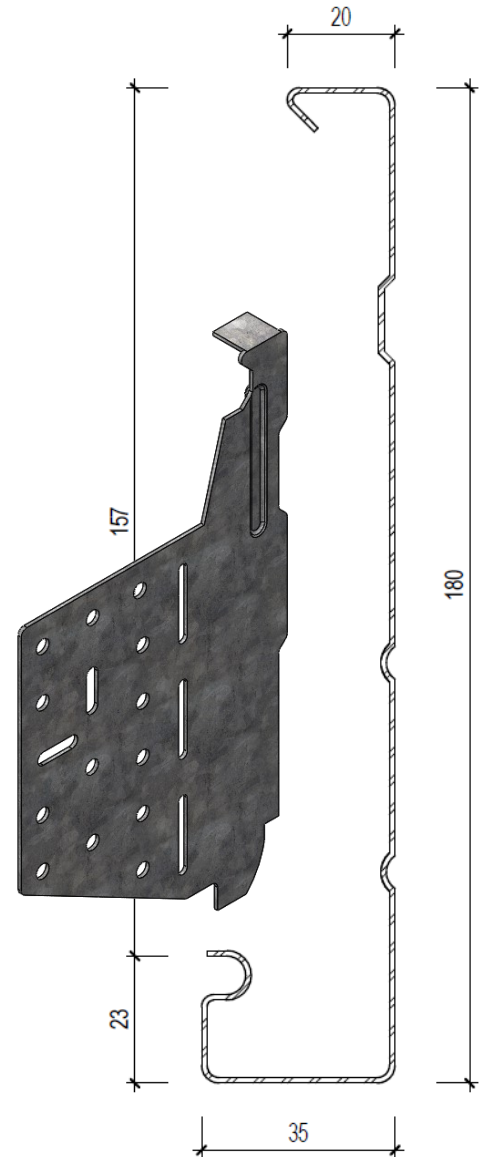

Scope of use	Continuous Group Truss Series fascia systems are intended for use as fascia and barge boards to support spouting systems, covering roof truss ends and gable ends around the roof perimeter on timber trussed residential buildings.
NZBC Compliance	Test information available from Pacific Coilcoaters, New Zealand Steel and Ambro Metals, combined with past history of fascia systems, indicate, that provided the product use and maintenance is in line with the guidelines contained in the current literature., Continuous Group truss series fascia systems can be expected to meet the performance criteria in clause E2 of the New Zealand building code.
Durability	All copper, brass and aluminium products listed above are fit for purpose in environment zone B, C, D and E* Pre-painted steel products are fit for purpose in environment Zone B and C* They may be used in environment zone D subject to a pre-approval warranty application based on site address* *In all cases, areas with high wind &/or salt &/or thermal/industrial atmospheric conditions may require specific engineering design (S.E.D) Reference: Section 4, "Durability" from NZS3604:2011.
Maintenance	Continuous Group Truss Series Fascia systems require regular maintenance to ensure the useful life of the products. Minimum maintenance interval of every 6 months or as often as needed to avoid build up of contaminants (dirt, salt, pollen etc.) on the fascia surface. Simply spray and rinse with water and/or if necessary scrub with a soft nylon brush. More information and specific maintenance products are available on our website www.continuous.co.nz/care-and-maintenance
Warranty	MagnaFlow™ : Environment zone B, C & D—10 year paint warranty ; 15 year perforation warranty. AlumiGard™ : 10 year paint warranty ; 15 year perforation warranty. Pure Copper & EuraMax : 20 year material and perforation warranty. Full details and conditions of our comprehensive warranty can be found at www.continuous.co.nz/warranties