

**Swaging/design may vary depending on material choice and region supplied.*

CUBE 125 BOX SPOUTING

Overview

The extra high front face of this sharp profile means it has your roof edge well and truly covered. The Cube suits a vast array of building types.

Features

- ✓ High front allows for extra fall
- ✓ Large Capacity
- ✓ Tough marine grade materials
- ✓ Bracket options to suit
- ✓ Up to 20 year material warranty
- ✓ Matching downpipes
- ✓ 15 standard colours and more!



Grey Friars with Internal Bracket



Pioneer Red with External Bracket



Finish Range	Spouting Material	Colour Choice	Bracket Material	Bracket Options	Downpipe Options
CG Range	MagnaFlow™	Top 15 Colours	Aluminium	Internal Box-5 External Box-5	65mm Round 80mm Round 100mm Round 3x2" Rectangle 4x2" Rectangle
Designer Range	MagnaFlow™	34 Designer Colours	Aluminium		
Endurance Range*	AlumiGard™	Top 4 Colours	Aluminium		
Euro Range*	EuraMax	4 Premium Colours	Aluminium		
Copper*	Pure Copper	Natural	Copper or Brass		

Available from these Continuous Group Locations:

NORTHLAND | AUCKLAND | WAIKATO | BAY OF PLENTY
 TARANAKI | GISBORNE | HAWKES BAY | MANAWATU | WELLINGTON
 NELSON | MARLBOROUGH | WEST COAST | CANTERBURY | OTAGO | SOUTHLAND



CUBE 125 BOX SPOUTING

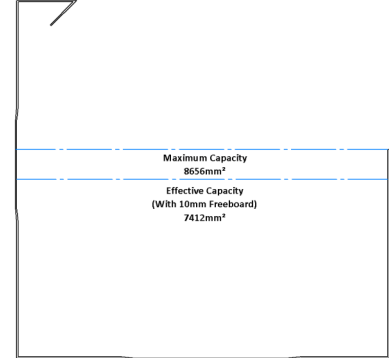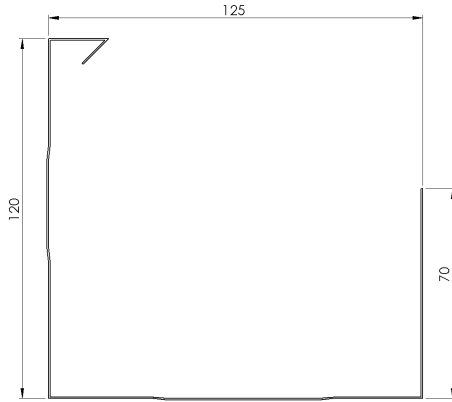

PRODUCT SPECIFICATIONS		CAPACITY SPECIFICATIONS	
MagnaFlow™ Pre-painted Steel	0.55mm G300 with a minimum of 200gsm alloy/zinc coating.	Maximum cross sectional area	8,656mm ²
AlumiGard™ Pre-painted Aluminium	0.70mm Grade 5005 H34	Effective cross sectional area with 10mm freeboard	7,412mm ²
EuraMax Pre-painted Aluminium	0.80mm Grade 5754 H42	Flow Capacity	110 Litres/min
Pure Copper Copper 3/4 Hard	0.60mm Grade C12200	Recommended fall	1:500 = 2mm per 1 metre
Internal Bracket	2.50mm Aluminium 5052 H34 2.50mm Copper—hard (C12200)	Minimum Downpipe cross section	3,215mm ²
External Bracket	3.00mm Aluminium 5052 H34 3.00mm Copper—hard (C12200)	Recommended round standard downpipe sizes	100mm Ø = 7,539mm ² 80mm Ø = 4,776mm ²
Recommended Maximum bracket spacing	750mm 600mm where snow fall is possible	Recommended rectangle standard downpipe sizes	4x2" = 5,346mm ² 3x2" = 3,996mm ²
Recommended Fixings	Minimum Class 4 screw &/or rivet fasteners compatible with substrate and bracket material.		

Scope of use	Continuous Group rainwater systems are intended to collect and channel water that runs off a roof. It is intended that the metal spouting be placed at the perimeter of the building (Positioned outside the building envelope).
NZBC Compliance	Test information available from Pacific Coilcoaters, New Zealand Steel and Ambro Metals, combined with past history of rainwater products indicate, that provided the product use and maintenance is in line with the guidelines contained in the current literature, Continuous Group rainwater systems can be expected to meet the performance criteria in clause E2 of the New Zealand building code.
Durability	All copper and aluminium products listed above are fit for purpose in environment zone B, C, D and E* Pre-painted steel products are fit for purpose in environment Zone B and C* They may be used in environment zone D subject to a pre-approval warranty application based on site address* *In all cases, areas with high wind &/or salt &/or thermal/industrial atmospheric conditions may require specific engineering design (S.E.D) Reference: Section 4, "Durability" from NZS3604:2011.
Maintenance	Continuous Group rainwater systems require regular maintenance to ensure the useful life of the products. Minimum maintenance interval of every 6 months or as often as needed to avoid build up of contaminants (dirt, salt, pollen etc.) on the spouting surface. Simply spray and rinse with water and/or if necessary scrub with a soft nylon brush. More information and specific maintenance products are available on our website www.continuous.co.nz/care-and-maintenance
Warranty	MagnaFlow™ : Environment zone B & C—10 year paint warranty ; 12 year perforation warranty. MagnaFlow™ : Environment zone D—10 year paint warranty ; 10 year perforation warranty. AlumiGard™ : 10 year paint warranty ; 12 year perforation warranty. Pure Copper & EuraMax : 20 year material and perforation warranty. Full details and conditions of our comprehensive warranty can be found at www.continuous.co.nz/warranties