100 × 55MM RECTANGULAR · FS-100X55

100×55MM DOWNPIPE



FS-100X55

The larger rectangular downpipe. FS-100x55 carries 5,500mm² while still sitting flat against the wall, and is a roll-formed lock seamed downpipe.

Ideally suited for larger catchments where a flat wall line is wanted, and flat-face architecture.

- 100 × 55mm roll-formed rectangular downpipe
- 5,500mm² cross-section capacity
- Back-fix bracket, diecast aluminium
- Brackets at up to 2400mm centres
- Colour matched to your spouting
- Up to 20 year material warranty

SPECIFY YOUR 100×55MM DOWNPIPE

FINISH RANGE	DOWNPIPE MATERIAL	COLOUR CHOICE	BRACKETS
CG Range	ColorCote MagnaFlow pre-painted G300 steel, min 150gsm or ColorSteel Maxam, min 150gsm	17 CG Colours	Back fix
Designer Range	ColorCote MagnaFlow pre-painted G300 steel, min 150gsm or ColorSteel Maxam, min 150gsm	25 Designer Colours	Back fix
Copper	¾ hard pure copper, grade C12200	Natural patina	Back fix


AVAILABLE FITTINGS

None — bends are hand mitred on site

CAPACITY

5,500mm² cross-section

For downpipe calculations by roof area, refer to MRM Code of Practice sections 5.4.1, 5.4.2 and 5.7.

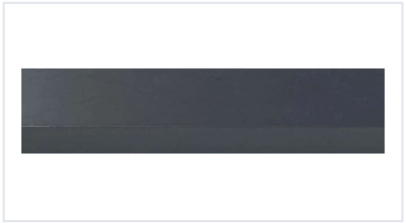

100×55mm Downpipe



100×55mm Back-fix bracket

Bends are hand mitred on site.

0800 50 1993
www.continuous.co.nz
cg@continuous.co.nz

All information, images and drawings are correct at time of publication August 2026